



## **INSTRUCTION MANUAL**

**CTXD-60-H**

### **CONTROLLER FOR AISG TYPE ADJUSTABLE DOWNTILT ANTENNAS**

Designed and Manufactured by  
ARGUS TECHNOLOGIES



# CONTENTS

<b>1</b>	<b>INTRODUCTION</b>	<b>4</b>
1.1	Application	5
<b>2</b>	<b>SPECIFICATIONS</b>	<b>6</b>
2.1	Electrical Specifications	6
2.2	Mechanical Specifications	6
<b>3</b>	<b>ITEMS SUPPLIED AND ACCESSORIES</b>	<b>7</b>
3.1	CTXD-60-H Kit contents.	7
3.2	AISG Cable Connections.	7
<b>4</b>	<b>OPERATION</b>	<b>8</b>
4.1	CTXD-60-H Front Panel and Connector Location.	8
4.2	Connecting the CTXD-60-H.	9
4.3	Operation of CTXD-60-H.	9
4.4	Using the external charger.	22
<b>5</b>	<b>WARRANTY AND REPAIR</b>	<b>23</b>

# 1 Introduction

The CTXD-60-H is a hand held AISG communications device for reading information from Argus R-Type antennas, and adjusting the antenna electrical beam downtilt. It will read and display all antenna information and the currently set downtilt angle. However, it is not able to edit this information.



Figure 1. CTXD-60-H Remote Control Unit

## **1.1 Application**

Argus antennas that have the capability of AISG communications and adjustment of electrical downtilt carry the suffix “R” in their part numbers. An example is the “CNPX308.10R”. Older antennas with electrical downtilt adjustment carry the suffix “DR”. This device is not compatible with antennas suffixed with “DR”.

All “R” type antennas contain a processor and up to three measurement boards, each of these boards is associated to one of up to three bands in the antenna to measure independent downtilt setting for each band.

The CTXD-60-H is used to remotely communicate with the antenna processor and can retrieve antenna information such as:

- Unique Identifier
- Model Number
- Serial Number
- AISG Band
- Antenna Beamwidth
- Antenna Gain
- Maximum Electrical Down Tilt
- Minimum Electrical Down Tilt
- Installation Date
- Installer ID number
- Base Station ID Number
- Sector of Antenna
- Bearing of the Antenna
- Applied Mechanical Down Tilt

In addition, the CTXD-60-H is capable of transmitting to the antenna instructions to change the current downtilt of any of the three bands, and maintains communication until the new downtilt is set.

The CTXD-60-H is also fitted with a USB port and can be used as a USB to AISG communications adapter for computers running the appropriate software.

The CTXD-60-H is a handheld, 14.4v NiMH battery operated unit with an external battery charger. This battery supplies both power to the CTXD-60-H circuitry and provides all power needs to any connected antenna.

## 2 Specifications

### 2.1 Electrical Specifications

Battery Power	14.4 V DC, NiMH Battery 1.5 Amp/Hours
Mains Power via Supplied Charger	100-240VAC 50-60Hz max 0.9A
Number of AISG ports	1
Number of USB Ports	1
Supply Voltage to Antenna	12V DC
Supply Current to Antenna	1.5AMP Maximum
Display	Mono Graphic LCD with Yellow backlight.
USB 1.1 Compatibility	Windows XP, 2000, NT.

### 2.2 Mechanical Specifications

Width	80 mm
Height	180 mm
Depth	60 mm
Weight	580gms
Material	ABS Plastic Injection Moulded Case

### 3 Items Supplied and Accessories

#### 3.1 CTXD-60-H Kit contents.

The following items are supplied as standard with each CTXD-60-H Kit:


Item	Qty	Description
CTXD-60-H	1	AISG type antenna controller
AISG Cable	1	2m AISG cable
External Charger	1	Type 2215 Charger
Power cable	1	2m two pin AC power cable.
USB Cable	1	USB Mini-B cable
Case	1	Silver Type Briefcase with Foam Inserts and keys.
Remote CD	1	Argus CD containing various softwares.
Instruction manual	1	This manual

#### 3.2 AISG Cable Connections.

PIN	AISG Definition	CTXD-60-H
1	+12V	Not connected
2	-48V	Not connected
3	RS485 B	RS485B
4	RS485 GND optional	Not connected
5	RS485 A	RS485A
6	+24V	+14.4V $\pm$ 1V
7	DC return	DC return
8	Not connected	Not connected

## 4 Operation

### 4.1 CTXD-60-H Front Panel and Connector Location.

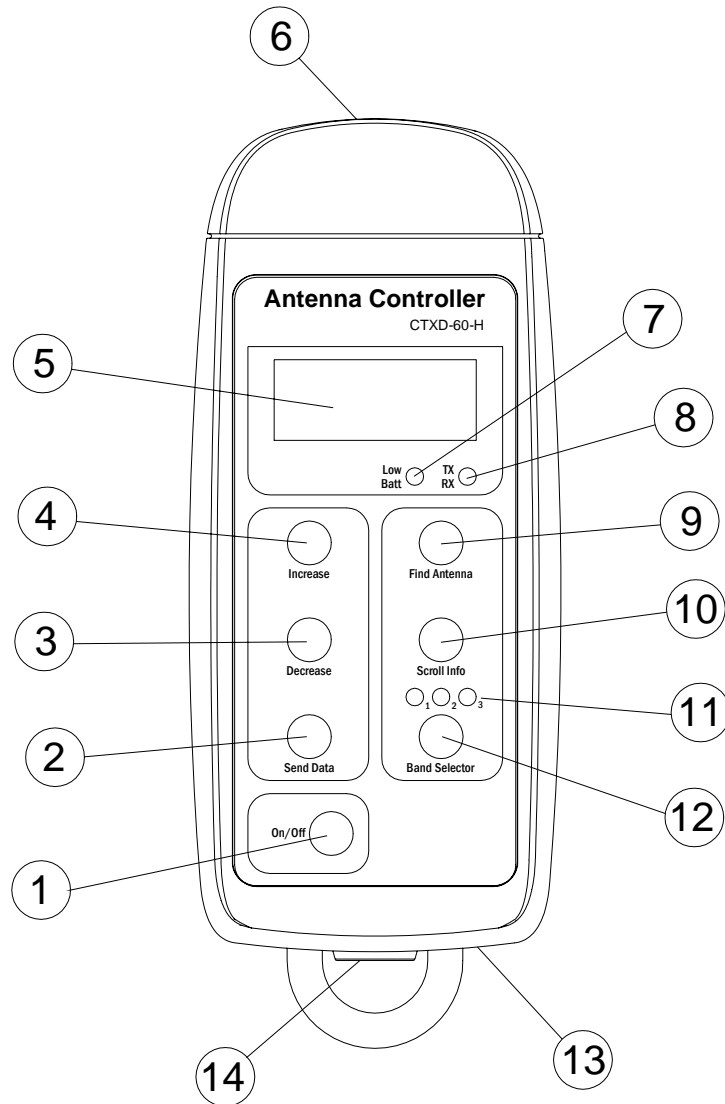

1. Power On / Off Button
2. Send Data Button
3. Decrease Button
4. Increase Button
5. LCD Display
6. AISG Connector
7. Low Battery Light


8. TX/RX Indicator
9. Find Antenna Button
10. Scroll Data Button
11. Selected Band Indicator
12. Band Selector Button
13. USB Connector and Cover
14. Battery Charger Connector

**Figure 3. Controller Details.**

## 4.2 Connecting the CTXD-60-H.

The CTXD-60-H is connected to the AISG capable device(s) by the AISG connector, using the supplied AISG cable.

The CTXD-60-H may also be connected to a PC running the appropriate software for extended data capabilities using the supplied USB cable.

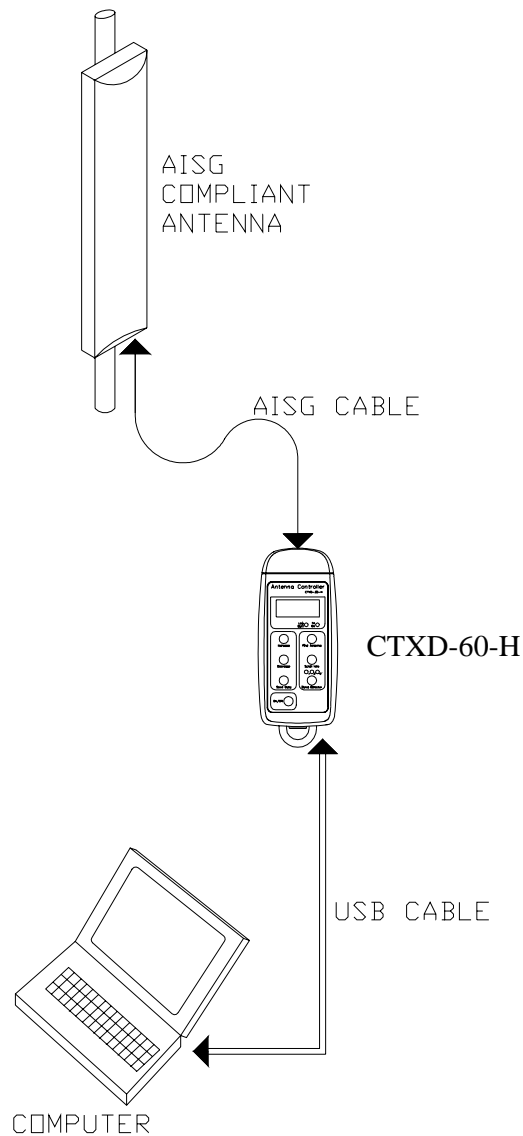

**Figure 4. Controller Interconnection Showing Optional PC Interface**

## 4.3 Operation of CTXD-60-H.

### 4.3.1 Turning the unit On.

To turn on the unit, press and hold the ON/OFF button until the unit starts. The LCD will then read:

BOOTING...

for approximately 6 seconds, then the screen will change to:

ARGUS TECHNOLOGIES  
HDWR VERSION: xxx  
SFTWR VERSION: x.xx  
AISG VERSION: x.x

for approximately 2 seconds, then the screen will change to:

ARGUS TECHNOLOGIES

PUSH FIND TO OPERATE

and the CTXD-60-H is ready to use.

### 4.3.2 Changing the AISG Communications Version and the Scan Type

To access the setup menu, after turning the unit on, whilst the screen displays:

ARGUS TECHNOLOGIES  
HDWR VERSION: xxx  
SFTWR VERSION: x.xx  
AISG VERSION: x.x

press the 'Increase' and the 'Find Antenna' buttons simultaneously. This action will put the unit into the setup menu. The screen will display the following:

SETUP MENU  
AISG VERSION: 2  
SCAN TYPE: UNIQUE ID

To toggle the option selected (highlighted), press the 'Scroll Info' button. To toggle between 'AISG VERSION' and 'SCAN TYPE' press the 'Increase' and 'Decrease' buttons.

The AISG version will toggle between '1' and '2'. The CTXD-60-H is compatible with both AISG Version 1.1 and Version 2. If the antenna to be controlled is AISG Version 1.1, toggle the option AISG VERSION to '1'. If the antenna to be controlled is AISG Version 2, toggle the option AISG VERSION to '2'.

The SCAN TYPE will toggle between 'UNIQUE ID' and 'HDLC'. The CTXD-60-H has the ability to do two types of scans.

The 'UNIQUE ID' option scans for antenna serial numbers, and once it has found an antenna, it assigns it an HDLC address, starting at HDLC address 1, then 2 etc. This scan is typically done on installation of the antennas.

The 'HDLC' option scans for antenna HDLC addresses, scanning from 1 to a user defined limit.

Once the setup options are set to the user's preferences, press the 'SEND DATA' button to exit. If there has been a change made to the preferences, the bottom line of the LCD will read 'SAVING CHANGES'. This will save the user's preferences so that the unit will remember them.

### **4.3.3 Scanning for antennas via HDLC address**

With "PUSH FIND TO OPERATE" on the LCD. Press the 'FIND' button once, this brings up the scan range setting screen.

The screen reads

"PRESS INC/DEC TO"  
"CHANGE NO. OF DIGITS TO"  
"SCAN: 1"  
"PRESS FIND TO START"

You can change the number of units to scan for by pressing the 'Increase' and 'Decrease' buttons.

Press the 'Increase' button and the screen reads:

"PRESS INC/DEC TO"  
"CHANGE NO. OF DIGITS TO"  
"SCAN: 2"  
"PRESS FIND TO START"

Now press the 'Decrease' button and the screen reads:

"PRESS INC/DEC TO"  
"CHANGE NO. OF DIGITS TO"  
"SCAN: 1"  
"PRESS FIND TO START"

With a 1 selected, the unit scans from 1 to 10. With a 2 selected the unit scans from 1 to 100. With a 3 selected, the unit scans from 1-254.

When you have selected the appropriate number of units to scan for, press the 'FIND' button again to commence scanning.

#### 4.3.4 Scanning for antennas via Unique Identifier

With "PUSH FIND TO OPERATE" on the LCD. Press the 'FIND' button once, this brings up the scan range setting screen.

The screen reads

"PRESS INC/DEC TO"  
"CHANGE NO. OF DIGITS TO"  
"SCAN: 3"  
"PRESS FIND TO START"

You can change the number of units to scan for by pressing the 'Increase' and 'Decrease' buttons.

Press the 'Increase' button and the screen reads:

"PRESS INC/DEC TO"  
"CHANGE NO. OF DIGITS TO"  
"SCAN: 4"  
"PRESS FIND TO START"

Now press the 'Decrease' button and the screen reads:

"PRESS INC/DEC TO"  
"CHANGE NO. OF DIGITS TO"  
"SCAN: 3"  
"PRESS FIND TO START"

With a 2 selected, the unit scans from xxxxxx00 to xxxxxx99  
With a 3 selected, the unit scans from xxxxx000 to xxxxx999.  
With a 4 selected, the unit scans from xxxx0000 to xxxx9999. etc

The unit scans for unique serial numbers, using a predetermined algorithm which minimises the time spent scanning.

When you have selected the appropriate number of units to scan for, press the 'FIND' button again to commence scanning. When an antenna is located, a new HDLC address will be assigned to it, with the first antennas HDLC address starting at 1.

Depending upon the number of antennas connected and their serial numbers, the user may have to choose a higher number of digits to scan antennas with. If there are more AISG compliant devices to be found, the user will be alerted by the unit with the following screen:

"THERE ARE MORE DEVICES"  
"TO BE FOUND. INCREASE"  
"THE NUMBER OF SCANS"

in which case the user should repeat a scan with a higher number digit to scan with.

NOTE: to interrupt a scan in progress press and hold the On/Off button. This will interrupt the scan and switch the unit off.

#### 4.3.5 Completion of Scanning

Once the scanning process has finished, the unit will have found all antennas that are connected via the AISG cable and will remember their HDLC address, regardless of which type of scan was chosen.

The antenna found first in the scanning process(HDLC address 1) will have its information displayed on the LCD, as follows:

“AR -----xxxxxxxxx” the devices unique identifier number  
“MDL: xxxxxxxx” the model of the device.  
“SET DOWNTILT xx.x” this is the new angle to set.  
“READ DOWNTIL xx.x” this is the actual down tilt set.

NOTE: both the set downtilt and the read downtilt should be the same unless actually changing the antenna downtilt. Once any change is complete both downtilt should again be the same but at the new downtilt.

If there are more than one AISG compliant devices connected to the CTXD-60-H, the user may scroll through the antennas by pressing the ‘FIND’ button until the desired antenna is displayed on the LCD.

To initiate a new scan, the user must first turn off the unit, then turn on the unit, then repeat the scanning process.

#### 4.3.6 Scrolling Antenna Information.

Once you have found an antenna and set its HDLC address you may scroll through the antenna data by pressing the SCROLL DATA button for different information which is displayed on the second line of the LCD

“MDL: xxxxxxxx” is the model number.

Press SCROLL DATA

“S/N: xxxxxxxx” is the serial number.

Press SCROLL DATA

“BANDS: x” is the number of bands.

Press SCROLL DATA

“BEAMWIDTH: xx,xx,xx,xx” is the beamwidth.

Press SCROLL DATA

“GAIN xx.xx” is the antenna gain.

Press SCROLL DATA

“MAXTILT: +/- xx.xx” is the maximum amount of adjustable electrical tilt.

Press SCROLL DATA

“MINTILT: +/-xx.xx” is the minimum amount of adjustable electrical tilt.

Press SCROLL DATA

“DATE: xx/xx/xx” is the installation date.

Press SCROLL DATA

“INSTAL ID: xxxxxxxx” is the installer’s ID.

Press SCROLL DATA

“BTS ID: xxxxxxxx” is the base station ID.

Press SCROLL DATA

“SECTOR: xxxxxx” is the sector of the antenna.

Press SCROLL DATA

“BEARING: x” is the bearing of the antenna.

Press SCROLL DATA

“MECHTILT: xx.xx” is the amount of mechanical tilt of the antenna.

Press SCROLL DATA

Returns to the first option in the list of antenna data.

#### **4.3.7 Selecting a band.**

Once an antenna is found the CTXD-60-H automatically selects band 1. If the antenna has numerous bands(maximum of 3) then you can press the BAND SELECTOR button and this will cycle through the available bands of the antenna. Each time you select a new band, the unit displays that bands downtilt value on the fourth line:

“READ DOWNTILT: +/-xx.x” the angle of downtilt currently set.

When you at the last available band pressing the BAND button again will return you to band 1 of the antenna.

#### **4.3.8 Setting new down-tilt angle.**

You can change the downtilt of any band on any antenna that the CTXD-60-H is connected to by selecting the desired antenna, then the desired band. The unit should read out the currently set angle on the fourth line.

“READ DOWNTILT: +/-xx.x” the angle of downtilt currently set.

The third line on the LCD will read

“SET DOWNTILT: +/-xx.x” the angle of desired downtilt.

and also shows the current downtilt angle. By pressing the up or down buttons you can change the angle on this line. Once this line reads the desired angle press the send button and the antenna will change its downtilt. The CTXD-60-H constantly updates the current angle during this process so you can see the angle changing on the fourth line

“READ DOWNTILT: +/-xx.x” the angle of downtilt currently set.

### 4.3.9 USB mode.

The CTXD-60-H USB mode is for use with the ARGUS PCUW software. The software requires WINDOWS XP, 2000 or NT to operate. For the first use of CTXD-60-H connected to a PC, the USB driver needs to be installed.

The following steps need to be taken to install the USB driver of CTXD-60-H.


## Installing the USB Drivers using Found New Hardware Wizard

If the computer has not recognized the CTXD-60-H, you will need to install the driver. This can be done through the Found New Hardware Wizard of your PC. You can start this wizard by connecting the CTXD-60-H to your PC using the supplied USB Cable.

Select “No, not this time” from the options below and press “Next”.




Then select Install from a list or specific location(Advanced) and press “Next”

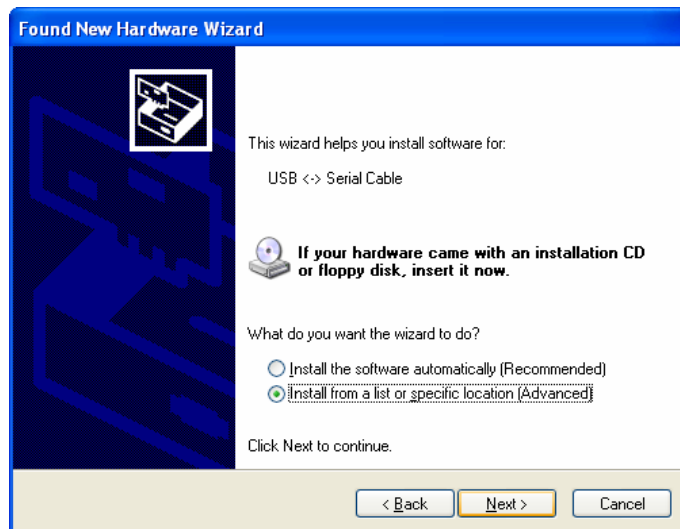


You will now need to insert the supplied CD into your CD drive.


Press the browse button and locate your CD drive and select the folder CDM 2.02.04 WHQL Certified. Now press "Next".

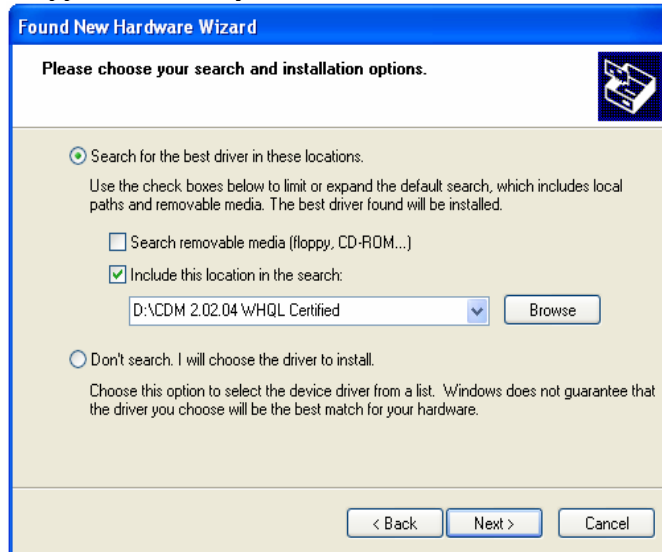

The driver will take a short time to be installed.

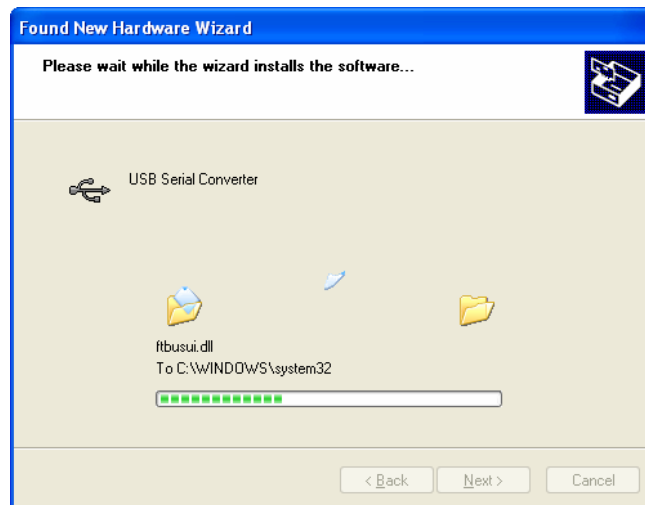


Once the driver installation is complete press “Finish”.

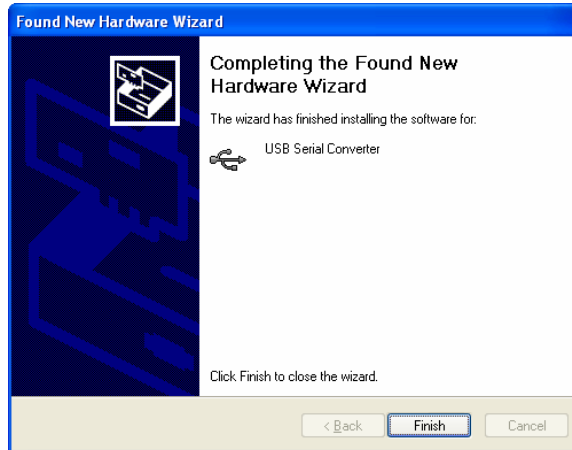


You may also be asked to install a USB Serial Port driver. If so repeat the same routine for this driver.

### *Customize PC serial port:*


To customise the serial adapter to a specific communications port, open your System Properties Window by right clicking on My Computer and selecting properties from the resulting menu.

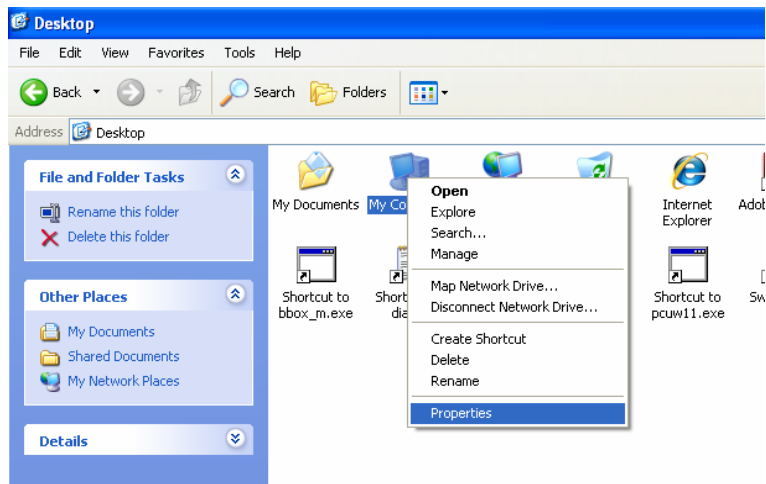


Then select the “Hardware” Tab at the top of “System Properties” Window and click on the “Device Manager” Button.

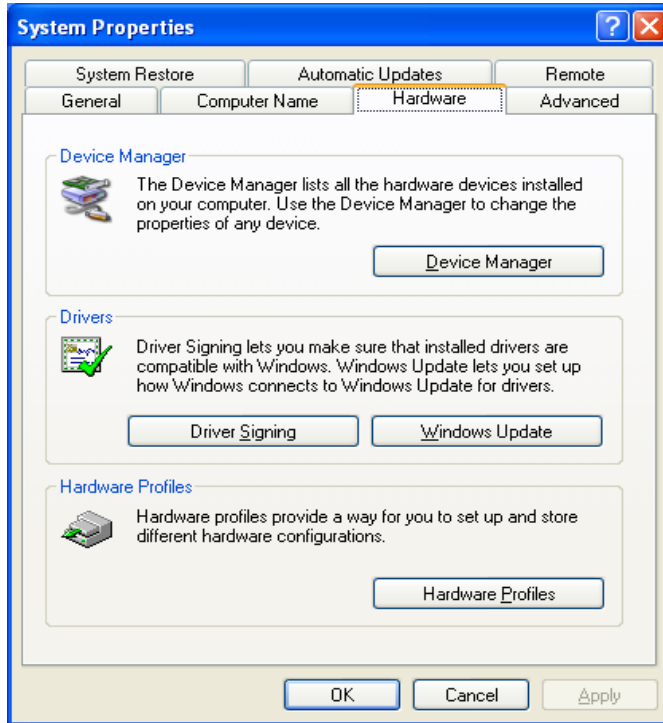

Find the device in the Device Manager Named USB Serial Port (COM?) and double left click on it.

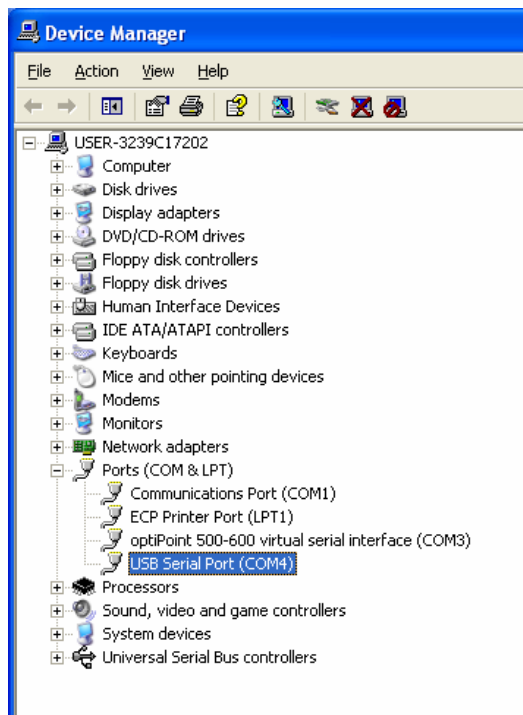


Select the Port Settings tab from the “USB Serial Port Properties” Window and press the “Advanced” button.

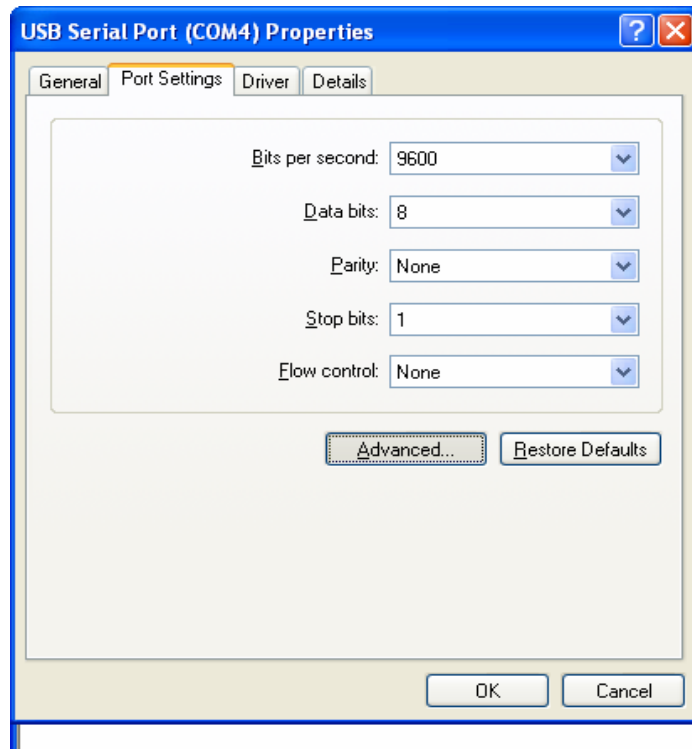

From the drop down list labelled COM Port Number:


Select a communications port that is not in use.

Then press “OK” for both the Advanced Setting and USB Serial port Properties Windows and close the Device Manager.

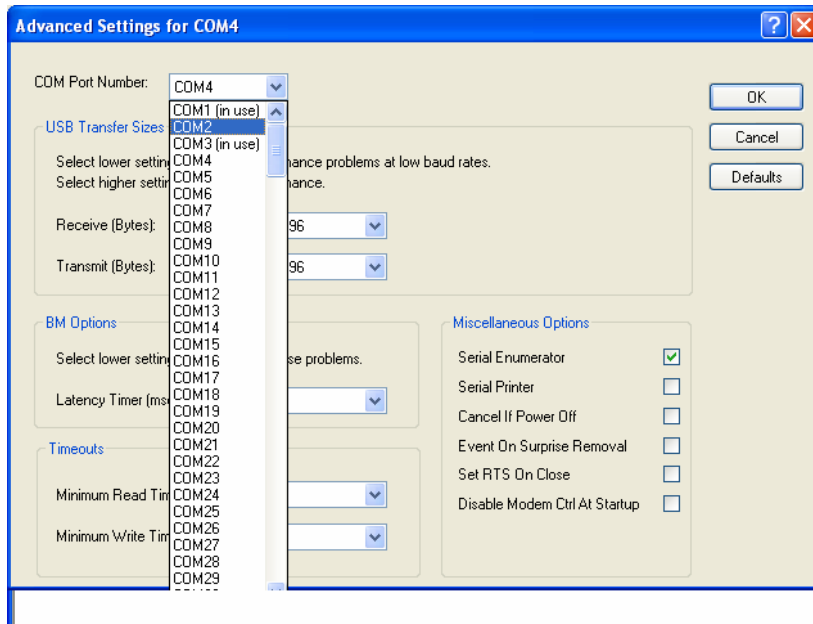

The COM port of the serial port of the PC should be the same as the COM port of the PCUW software. It should be set between COM1 and COM12. In case the COM port of PC sits in a COM port higher than 12, it should be changed to be between COM1 and 12.

The CTXD-60-H automatically switches into USB mode when connected to a computer USB port. The LCD shows the following graphic to indicate that the unit is in USB mode. Once the unit is in USB mode, the buttons no longer perform any functions.

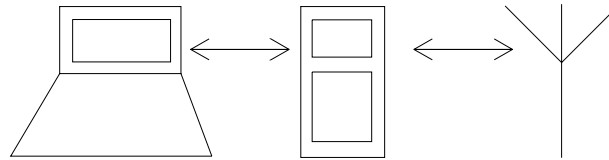

**Figure 5. USB Graph**

There are two ways in which the CTXD-60-H can be used in USB mode.

1. Connected to a PC running the ARGUS PCUW software. The unit acts as a power source for the antenna, as well as a USB to AISG converter. This is the most common way to use the unit in USB mode. To use the CTXD-60-H in this mode, refer to the ARGUS PCUW software
2. Boot loader mode. With the unit connected to a PC running the upld\_Argus software, the user turns on the CTXD-60-H and whilst the LCD screen reads : 'BOOTING...' The user may then upload new software for the CTXD-60-H in 6 seconds. After 6 seconds, CTXD-60-H will exit from the boot loader and display the USB graph.

#### **4.3.10 Turning the unit Off.**

To turn the unit off press and hold the ON/OFF button for about 1 second, release the button and the CTXD-60-H will then shut down and switch off.

NOTE: The CTXD-60-H will automatically turn off after approximately 6 minutes of no activity on any of the buttons.

#### **4.4 Using the external charger.**

**Warning:** The charger should **NOT** be used with the unit if the battery is not fitted. This may result in damage to the control unit.

The external charger is a rapid charger capable of charging the internal battery of the controller in approximately 2.5 hours, depending on battery condition.

The external battery charger may be used to run the unit in the case of a flat battery. It is recommended that the unit be switched off when the charger is first turned on. The charger then goes through the following steps.

1. It does an initial test on the battery's condition, designated by a yellow light on the charger;
2. The charger will then switch into fast charge mode designated by an orange light. This charges the battery at approximately 900mA and continually measures battery condition;
3. On completion of the fast charge cycle, the charger switches into top off charge and applies 130mA to the battery to ensure a fully charged state and is indicated by Green light momentarily flashing yellow;
4. When the battery is fully charged the charger switches to Trickle charge mode and applies 50mA to the battery circuits, this state is designated by a constant green light on the charger.

Note: If the light is flashing orange and green an error has occurred and will only apply 50mA to the Controller.

## 5 WARRANTY AND REPAIR

Argus Technologies warrants all products that it manufactures. To invoke this warranty, initial contact should be made with:

### **Argus Technologies (Australia) Pty Ltd**

10-12 Lexington Drive  
Norwest Business Park  
Bella Vista NSW 2153 Australia  
Telephone: +61 2 8884 0888  
Facsimile: +61 2 8884 0882  
Email: [info@argusantennas.com](mailto:info@argusantennas.com)

### **Argus Technologies (China) Ltd**

Bihua Building New Wing,  
No. 3 Jinxiu Road,  
GET, Guangzhou, 510730, PRC China  
Telephone: +86 20 8206 9995  
Facsimile: +86 20 8208 9055  
Email: [info@argusantennas.com](mailto:info@argusantennas.com)

### **Beijing**

Telephone: +86 10 6590 3338  
Facsimile: +86 10 8835 7366

### **Shanghai**

Telephone: +86 21 6247 6001  
Facsimile: +86 21 6247 6003

### **Argus Technologies (International) Ltd**

14th Floor, Fairmont House  
No. 8 Cotton Tree Drive Central,  
Hong Kong  
Telephone: +852 8226 9253  
Facsimile: +852 3184 8969  
Email: [info@argusantennas.com](mailto:info@argusantennas.com)

### **Argus Technologies (Europe) Ltd**

Unit 10, Cirrus Park,  
Lower Farm Road,  
Moulton Park Industrial Estate  
Northamptonshire  
NN3 6UR, England  
Telephone: +44 (0) 1604 644 016  
Facsimile: +44 (0) 1604 648 334  
Email: [info@argusantennas.eu](mailto:info@argusantennas.eu)